


THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS CONVEYED WITH THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF SELECT CONTROLS INCORPORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.

NOTES:

1. SWITCH: UNIDIRECTIONAL, NORMALLY OPEN, AUTOMATICALLY RESETTABLE
2. WEIGHT: 2 GRAMS MAXIMUM
3. CONTACTS: SPST, NORMALLY OPEN
4. CONTACT RESISTANCE: 10 OHMS MAXIMUM
5. CONTACT RATING: 150MA AT 28VDC
6. INSULATION RESISTANCE: 30 MEGOHMS MINIMUM AT 500 VDC
7. OPERATING CHARACTERISTICS:
CONTACTS MUST CLOSE WHEN SUBJECTED TO A STEADY STATE ACCELERATION OF, 2500 G'S +/- 15%
8. TEMPERATURE RANGE:
 - a) OPERATING: -65°F TO +185°F
 - b) NON-OPERATING: -65°F TO +221°F
9. SWITCH SEAL: HERMETIC; PER MIL-STD-750C, METHOD 1071, TEST CONDITION D.
10. LEAD STRENGTH: 3 LBS. MINIMUM AXIAL PULL

3148-1-000

REVISIONS				
ALT	DESCRIPTION	BY	CHK	ENG

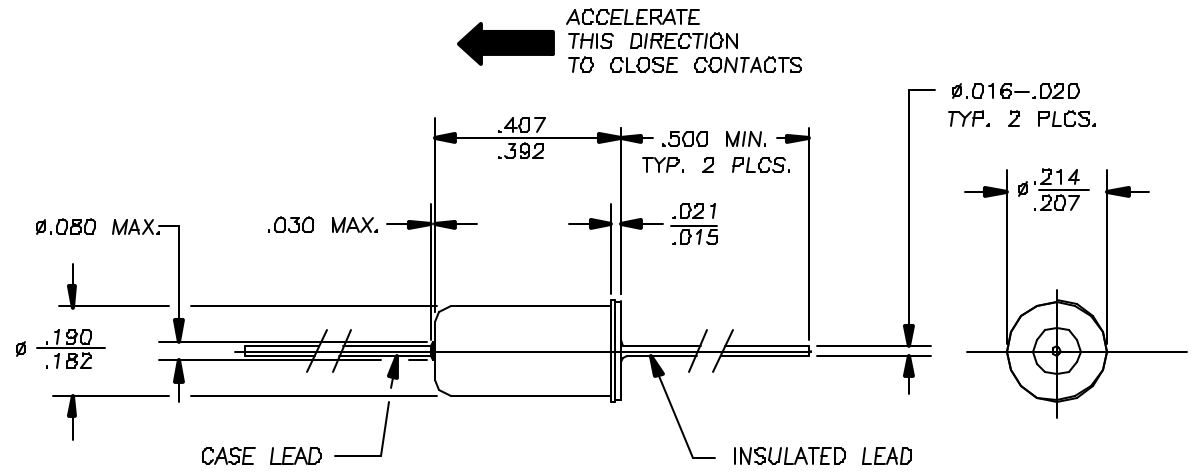

ITEM	NO. REQ'D	PART NO.	DESCRIPTION	REMARKS
BILL OF MATERIAL				
MATERIAL			45-3 KNICKERBOCKER AVE. BOHEMIA, N.Y. 11716	
FINISH				
TITLE ACCELERATION SWITCH NORMALLY OPEN 2500g			7/18/68 DRAWING NO. 3148-1-000	REV
DO NOT SCALE DRAWING REMOVE BURRS, BREAK SHARP EDGES TOLERANCES UNLESS SPECIFIED: FRACTIONS: ±1/64 ANGLE: ±0.20° MACH FINISH: 125/RAZ DEC: .00 ±.010 DEC: .000 ±.005		NO. REQ'D: N/A SCALE: 4:1 WEIGHT:	DESIGNED: [] CHECKED: [] APPROVED: [] DATE:	SHEET 1 OF 1