


THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS CONVERTED WITH THE EXPRESS CON-
 INTION THAT IT AND THE INFORMATION CONTAINED IN IT
 ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN
 WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EX-
 PRESS WRITTEN CONSENT OF SELECT CONTROLS INCORP-
 ORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR
 SID USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.

NOTES:

1. SWITCH: UNIDIRECTIONAL, NORMALLY OPEN, AUTOMATICALLY RESETTABLE
2. WEIGHT: 2 GRAMS MAXIMUM
3. CONTACTS: SPST, NORMALLY OPEN
4. CONTACT RESISTANCE: 10 OHMS MAXIMUM
5. CONTACT RATING: 150MA AT 28VDC
6. INSULATION RESISTANCE: 30 MEGOHMS MINIMUM AT 500 VDC
7. OPERATING CHARACTERISTICS:
 CONTACTS MUST CLOSE WHEN SUBJECTED TO A STEADY STATE ACCELERATION OF,
 2500 G'S +/- 15%
- B. TEMPERATURE RANGE:
 a) OPERATING: -65°F TO +185°F
 b) NON-OPERATING: -65°F TO +221°F
9. SWITCH SEAL: HERMETIC; PER MIL-STD-750C, METHOD 1071, TEST CONDITION D.
10. LEAD STRENGTH: 3 LBS, MINIMUM AXIAL PULL

3148-2-000

REVISIONS		BY	CHK	ENG
ALT	DESCRIPTION			

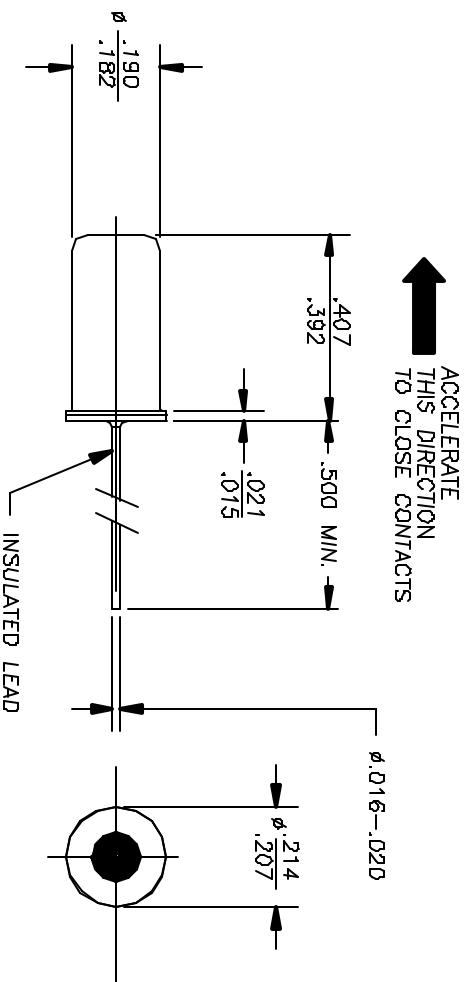

REV	DATE	DESCRIPTION	REMARKS

MATERIAL		TITLE		BILL OF MATERIAL		DESCRIPTION		REMARKS	
		ACCELERATION SWITCH NORMALLY OPEN 2500g							
FINISH									
DO NOT HOLE DRAWING REMOVE BURRS, BREAK SWAMP DEBRIS. TOLERANCES: FRACTIONS DECIMALS ANGLES ±.010 ±.015 ±.020 ±.030 ±.050 ±.075 ±.125									

REV	DATE	DESCRIPTION	REMARKS

Select Controls Inc.
 45-3 KNICKERBOCKER AVE.
 BOHEMIA, N.Y. 11716

DRAWING NO. 3148-2-000
 SHEET 1 OF 1