


THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS CONVERTED WITH THE EXPRESS CON-
 INTION THAT IT AND THE INFORMATION CONTAINED IN IT
 ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN
 WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EX-
 PRESS WRITTEN CONSENT OF SELECT CONTROLS INCORP-
 ORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR
 TO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.

NOTES:

1. SWITCH: UNIDIRECTIONAL, NORMALLY OPEN,
 AUTOMATICALLY RESETTABLE
2. WEIGHT: 2 GRAMS MAXIMUM
3. CONTACTS: SPST, NORMALLY OPEN
4. CONTACT RESISTANCE: 10 OHMS MAXIMUM
5. CONTACT RATING: 150MA AT 28VDC
6. INSULATION RESISTANCE: 30 MEGOHMS MINIMUM
 AT 500 VDC
7. OPERATING CHARACTERISTICS:
 - a) CONTACTS SHALL BE OPEN AT STEADY STATE
 ACCELERATIONS OF 15000 G'S OR LESS
 - b) CONTACTS SHALL BE CLOSED AT STEADY STATE
 ACCELERATIONS OF 22500 G'S OR MORE
8. TEMPERATURE RANGE:
 - a) OPERATING: -65°F TO +185°F
 - b) NON-OPERATING: -65°F TO +221°F
9. SWITCH SEAL: HERMETIC; PER MIL-STD-750C,
 METHOD 1071, TEST CONDITION D.
10. LEAD STRENGTH: 3 LBS. MINIMUM AXIAL PULL

3177-1-000

REVISIONS		BY	CHK	ENG
ALT	DESCRIPTION			

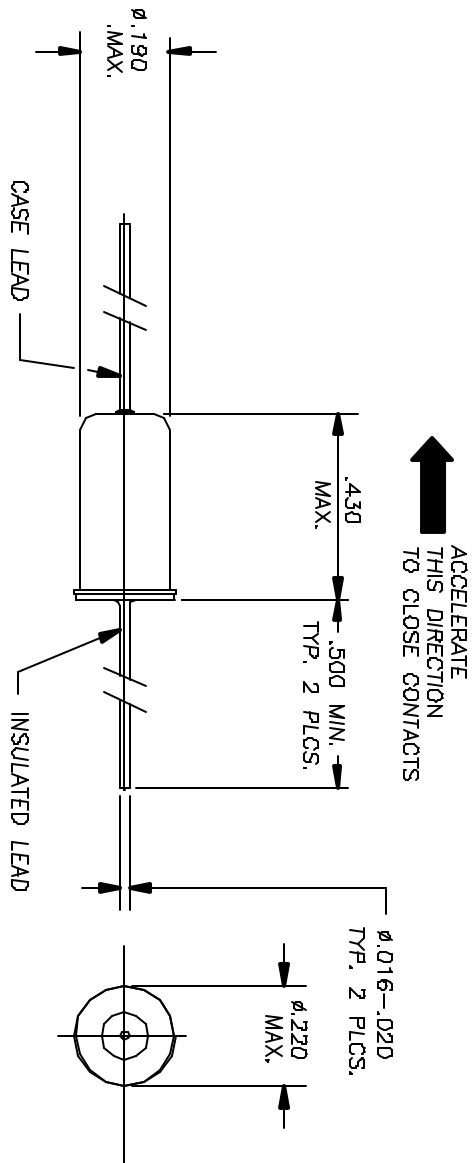

MATERIAL		PART NO.		DESCRIPTION		REMARKS	
FINISH		N/A		TITLE ACCELERATION SWITCH NORMALLY OPEN 18750 G		BILL OF MATERIAL	
DO NOT HOLE DRAWING REMOVE BURRS, BREAK SWAMP DEBRIS TELEPHONE TAPES, STAPLES AND E-FASTENERS MAGNETIC TAPE 125/		4-1-1		REV. 1		DATE 6/14/10	
REV. 1		N/A		DRAWING NO. 3177-1-000		SHEET 1 OF 1	
SELECT CONTROLS INC.		45-3 KNICKERBOCKER AVE. BOHEMIA, N.Y. 11716		DATE		REV	