


THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS COVERED WITH THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF SELECT CONTROLS INCORPORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.

NOTES:

1. WEIGHT: 4.0 GRAMS MAXIMUM
2. SENSITIVE TO: TIP-OVER AND/OR TILT
3. CONTACT OPTIONS: NORMALLY OPEN, CASE GROUND
4. CONTACT SPECIFICATIONS: RATING- 200mA @24 VDC RESISTANCE- <1000 OHMS
5. INSULATION RESISTANCE: 30 MEGOHMS @ 500 VDC
6. OPERATING CHARACTERISTICS:
 - a) SWITCH OPERATES 360° AROUND AND WHEN INVERTED 180°
 - b) SWITCH CLOSES AT 45° +/- 5° FROM 'UP' POSITION
7. TEMPERATURE: OPERATING -65° TO +185°F NON-OPERATING -65° TO +235°F
8. SWITCH IS HERMETICALLY SEALED
9. HEADER LEAD STRENGTH: 3 POUNDS MINIMUM AXIAL PULL WITHOUT DAMAGE

4005-1-000

REVISIONS		BY	CHK	ENG
ALT	DESCRIPTION			

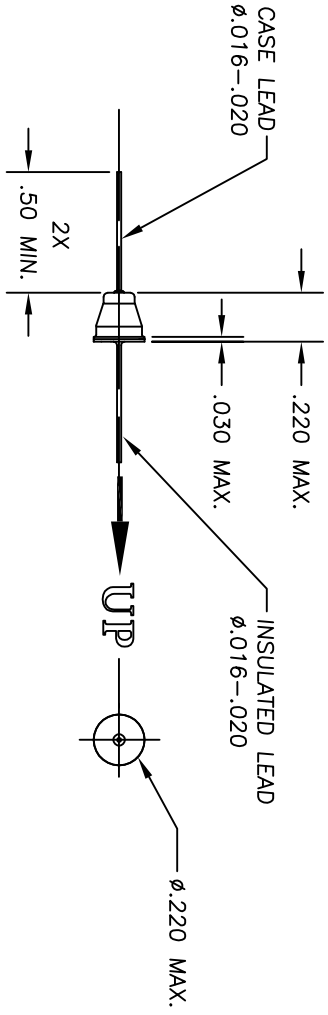

MATERIAL		TITLE		PART NO.		DESCRIPTION		REMARKS	
FINISH		SWITCH, TIP-OVER/TILT		N/A		45-3 KNICKERBOCKER AVE. BOHEMIA, N.Y. 11716			
DO NOT SCALE DRAWING REMOVE BURNS, BREAK SHARP EDGES. TOLERANCE UNLESS SPECIFIED: FRACTION 1/32 DECIMAL .005 DIMENSIONS .010 DECIMAL .005		SCALE: 2:1		WEIGHT: NOTED		DATE: 6/9/11		DRAWING NO.: 4005-1-000	
NO. REV'D		NO. REV'D		NO. REV'D		NO. REV'D		REV	
		N/A		N/A		NOTED			

Select Controls Inc.

45-3 KNICKERBOCKER AVE.
BOHEMIA, N.Y. 11716

DATE: 6/9/11

DRAWING NO.: 4005-1-000

SHEET 1 OF 1