

THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS CONVEYED WITH THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF SELECT CONTROLS INCORPORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.


NOTES:


1. WEIGHT: 2.0 GRAMS MAXIMUM (A)
2. SENSITIVE TO: TIP-OVER AND/OR TILT
3. CONTACT OPTIONS: NORMALLY OPEN OR NORMALLY CLOSED, CASE GROUND
4. CONTACT SPECIFICATIONS: RATING- 200ma @24 VDC
RESISTANCE- <350 OHMS
5. INSULATION RESISTANCE: 30 MEGOHMS @ 500 VDC
6. OPERATING CHARACTERISTICS:
VARIABLE-DEPENDENT ON MOUNTING ANGLE OR ORIENTATION
7. TEMPERATURE: OPERATING -65° TO +185°F
NON-OPERATING -65° TO +235°F
8. SWITCH IS HERMETICALLY SEALED
9. CASE LEAD AND HEADER WELD STRENGTH:
3 POUNDS MINIMUM AXIAL PULL WITHOUT DAMAGE

5023-1-000

A

REVISIONS				
ALT	DESCRIPTION	BY	CHK	ENG
A	SEE ECN5023-1-000A	AHN		

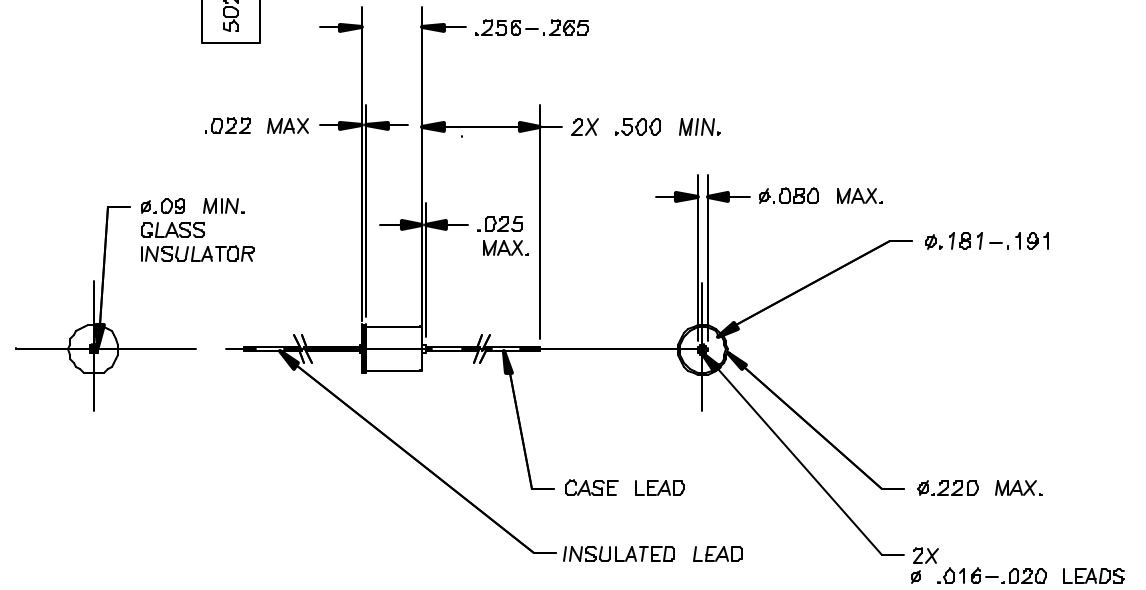

ITEM NO.	NO. REQ'D	PART NO.	DESCRIPTION	REMARKS	
BILL OF MATERIAL					
MATERIAL -----		TITLE SWITCH, TIP-OVER/TILT			
FINISH -----		 350 I CENTRAL AVE. BOHEMIA, N.Y. 11716			
DO NOT SCALE DRAWING REMOVE BURRS, BREAK SHARP EDGES TOLERANCES UNLESS SPECIFIED: FRACT: ± 1/16" ANGLE ± 30° MACH FINISH: ✓ DEC: .00 ± .003 RHS DEC: .000 ± .010		NO. REQ'D N/A	NO. REQ'D N/A	SCALE: 2:1	DESIGNED: AHN DRAWN: 7/2/03 CHECKED: [] APPROVED: [] DATE: []
		WEIGHT: NOTED		DRAWING NO. 5023-1-000 SHEET 1 OF 1	
				REV A	